

MS3115 – DUMMY STOWAGE RECEPTACLE

Interface with MIL-DTL-26482 SERIES I & II Plug connector

PART NUMBER → **A C** **3115-** **8** **W**

AMP MIL CODE

SPECIFICATION

MS3115 = Dummy Stowage Receptacle

SHELL SIZE

8, 10, 12, 14, 16, 18, 20, 22, 24

SHELL FINISH

L = Electroless Nickel

W = Cadmium Olive Drab (500hour salt spray requirement)


K = Zink Nickel Black

DUMMY RECEPTACLE

Use dummy stowage receptacle to secure and protect unused plugs. AC3115- receptacle accommodates MIL-DTL-26482 Series I & II Bayonet plug connectors. The Gasket provides the sealing against harsh environment

PRODUCT MATERIAL & FINISH

SL.NO	PART	MATERIAL	FINISH	REMARKS
1	Shell Body	Aluminium Alloy	L, W, K,	
2	Gaskets	Silicon	Brick red	

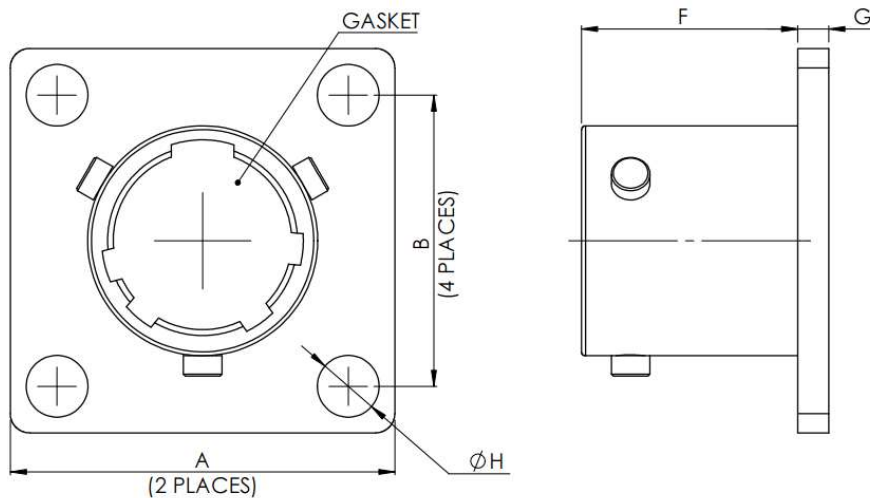

All dimensions are in mm

CONNECTOR SHELL SIZE	A	B	F	G	ØH (4holes)
	MAX	CTC	+0.79	+0.41	+0.127
			-0.0	-0.41	-0.127
8	21.03	15.09	11.73	1.57	3.05
10	24.23	18.26	11.73	1.57	3.05
12	26.59	20.62	11.73	1.57	3.05
14	28.98	23.01	11.73	1.57	3.05
16	31.34	24.61	11.73	1.57	3.05
18	33.73	26.97	11.73	1.57	3.05
20	36.91	29.36	14.12	2.39	3.05
22	40.08	31.75	14.12	2.39	3.05
24	43.26	34.93	14.96	2.39	3.73